



HYDRAMate Dirt Block II[®]

DBT SERIES POLYPROPYLENE FIBER CARTRIDGES



Description

- HYDRAMATE DBT economical & longer life cycle depth filter cartridges are constructed of pure polypropylene fiber.
- To produce filter with melt-brown process.
- Non-fiber releasing, suitable for high temperature application.
- Materials are FDA listed as acceptable for potable and edible.
- Available in a wide selection of micron rating from 1 μ m to 100 μ m.

Application

- DI-water, chemical, food & beverage, coating, and cosmetic

Specification

Material of Construction

- Media : polypropylene microfiber 100%
- Structure : coreless cartridge

Recommended Operating Conditions

- Maximum differential pressure : 43.5 psi (3.0 bar) at 25°C
- Maximum temperature : 80°C


Removal Ratings (μ m)

- 1,3,5,100

Cartridge Dimensions

- Inner diameter : 28 / 30mm
- Outer diameter : 64 mm
- Length(mm) : 250, 508, 762, 1016

Liquid flow rate per 10" Filter cartridge

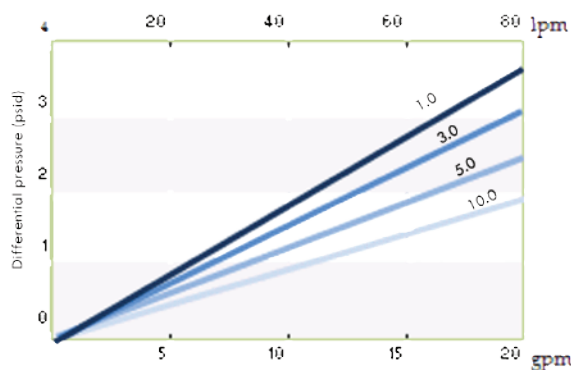

Ordering Information

DBT

-

0.5

-

10

Micron Rating

0.5
1
3
5
10
25
50
100

Length

10"
20"
30"
40"