
## Stainless Steel Cartridge Filter Housing

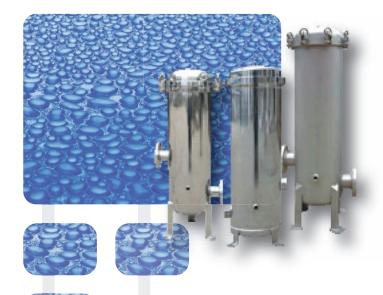

Industrial filter housing pleated for high flow rates and superior filtration.

Filter housings are available in stainless steel for commercial, industrial and small community water filtration applications.

### **Features and Benefits**

- 304 or 316L stainless steel construction for corrosion resistance
   & durability
- Spring shoulder sealing plates assembly provide a solid fit into the cartridge core to ensure a positive cartridge sealing
- Swing V-clamp for quick easy cartridge to reduce downtime
- Knife edge seal at both cartridge ends to eliminate by-pass
- Adapters for cartridge with cup & post and 222 or 226 optional
- Mounting tabs, legs & custom fittings available by special order

■ Liquid Pressure Rating : 150psi (10.3bar) @ 200 F<sup>°</sup>(93 C°)

■ Housing material : 304 or 316L stainless steel

■ Inlet/Outlet Connections: 1 inch or 3 inch FNPT, Victaulic

and flanges




# Optional Upstream Vent Port: 1/4 inch NPT Drain Port: 1/2 inch FNPT Shell O-ring Material: Buna-N, EPDM optional Cartridge Length: 10", 20",30",40" Filters



# Housing Components and Dimensions

Model	A (mm)	B (mm)	C (mm)	D (mm)	E (mm)	F (mm)	In/Out	Drain
HDM-W3L1-2"	120	220	600	170	216	230	2"	1/4" - 1/2"
HDM-W3L2-2"	120	220	850	170	216	230	2"	1/4" - 1/2"
HDM-W3L3-2"	120	220	1100	170	216	230	2"	1/4" - 1/2"
HDM-W3L4-2"	120	220	1350	170	216	230	2"	1/4" - 1/2"
HDM-W5L1-2"	120	220	610	200	248	260	2"	1/4" - 1/2"
HDM-W5L2-2"	120	220	860	200	248	260	2"	1/4" - 1/2"
HDM-W5L3-2"	120	220	1110	200	248	260	2"	1/4" - 1/2"
HDM-W5L4-2"	120	220	1360	200	248	260	2"	1/4" - 1/2"
HDM-W7L1-2"	120	220	620	250	310	310	2"	1/2"
HDM-W7L2-2"	120	220	870	250	310	310	2"	1/2"
HDM-W7L3-2"	120	220	1120	250	310	310	2"	1/2"
HDM-W7L4-2"	120	220	1370	250	310	310	2"	1/2"



## Ordering Information

Reading from left to right, select which specification you require and fill in the box with the code for that option.According to the result, we can provide optimal products to you.

HDM

Connection

NO. of Columns Cartride Length

W3 = 3 Round

L2 = 20"

L1 = 10"

Type

W5 = 5 Round

L3 = 30"

2 = 2" FNPT

W7 = 7 Round

L4 = 40"